



ype:	Project:
------	----------

5" Adjustable Truncated Cone Trim w/ Internal Non-Glare Reflector **Insulated Ceiling Housing - 7.5" Height** 12V Bi-Pin Base MR16 Lamp 50 Watts Max.

☐ ACT-2085WH☐ ACT-2085S	☐ ACT-2085BK☐ ACT-2085SS
	☐ ACT-2085PM

w/ ACT-952-IC Housing

Magnetic

Transformer

DESCRIPTION:

Recessed trim with internal 15° truncated cone reflector with non-glare finish. Trim has 360° rotational and 35° (0° vertical to 35° tilt) angle adjustability with angle locking mechanism in trim. Housing accommodates various ceiling thicknesses.

ELECTRICAL:

120V input, 12V output. Junction box is U.L. listed for through branch wiring.

CONSTRUCTION:

Housing and plaster frame: 18 gauge CRS Trim ring, j-box and hanger assemblies: 16 gauge CRS.


SYSTEM PROTECTION:

Steel Safety

Cable


Thermal protection provided to guard against overheating and misuse of insulation over and around fixture.

accessories,



Hanger Bars extend from


14" to 25.25" max.



Perforated flap for

secure drywall

installation

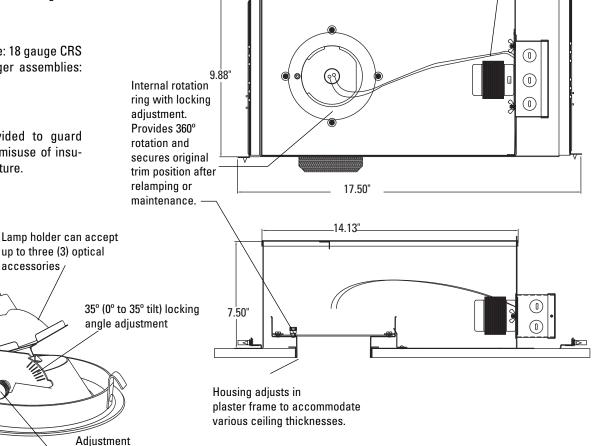

Item #	Description	Finish	Voltage / Wattage
ACT-2085WH / ACT-952-IC	Accurus Series Adjustable Truncated Cone Trim with	White	12V / 50W Max.
ACT-2085BK / ACT-952-IC	Insulated Ceiling Housing w/ Magnetic Transformer	Black	
ACT-2085S / ACT-952-IC		Silver	
ACT-2085SS / ACT-952-IC		Stainless Steel	
ACT-2085PM / ACT-952-IC			



For 277 volt transformer add "277" to end of item #.For Chicago Plenum add "CP" to end of item #.

Locking Knob

STATE OF WASHINGTON AIRTIGHT APPROVED